

SLP-TX420

4 inch Thermal Transfer
Desktop Label Printer



Retail



Healthcare &
Pharmacy




Post &
Parcel



Warehouse &
Storage
Handling

Compact, Durable and Premium

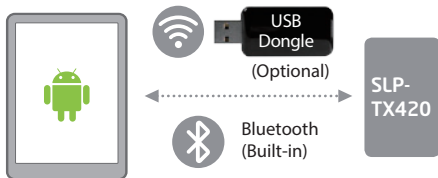


Mobile Device Compatible

- Built-In Bluetooth with MFi iAP2 Certified
- Smart Bluetooth Auto Switch :Switching from iOS settings to standard Bluetooth mode
- Optional Ethernet and WLAN supported (USB dongle type)
- Compatible with Smart Mobile Devices



Outstanding Form Factor

- Fast printing speed up to 7 ips (178 mm/sec)
- Quick data processing through powerful memory
- Compact design for 74 m ribbon
- Energy-efficient product

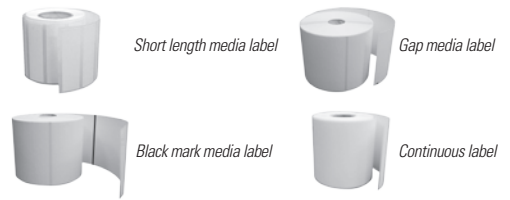

Intelligent Function

- Smart Media Detection™ : Automatic paper detection
- Intelligent Leap-over™ detects empty label and automatically leaps to the next label.
- Fully compatible with market-leading programming languages

SLP-TX420

4 inch Thermal Transfer
Desktop Label Printer

Specifications

Printer Specifications

Print Method

Thermal Transfer, Direct Thermal

Print Speed

SLP-TX420: Up to 7 ips (178 mm/sec)

SLP-TX423: Up to 5 ips (127 mm/sec)

Print Resolution

SLP-TX420: 203 dpi

SLP-TX423: 300 dpi

Print Width

SLP-TX420: Up to 108 mm

SLP-TX423: Up to 105.7 mm

Print Length

6 ~ 2000 mm

Sensor

Transmissive, Reflective (Adjustable), Ribbon-End, Head open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

20 ~ 110 mm

Media Roll Diameter

Up to 130 mm

Media Thickness

0.06 ~ 0.20 mm

Supply Method

Easy Paper Loading

Ribbon Characteristics

Ribbon Type

Wax, Wax/Resin, Resin, Outside

Ribbon Width

110 mm

Ribbon Length

Up to 74 m

Core Inner Diameter

12.5 mm

Physical Characteristics

Dimensions (WxDxH)

200 x 252 x 173 mm

(7.87 x 9.92 x 6.81 inch)

Weight

2.35 kg (5.18 lbs.)

Power

EnergyStar Certified,

External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory

64MB SDRAM, 128MB FlashROM

Interface Options

All-In-One Interface

Standard: USB+Serial+Parallel

Optional: USB+Serial+Ethernet+WLAN*

USB+WLAN*+Bluetooth**

* WLAN: 802.11b/g/n USB dongle type (Optional)

** Bluetooth: Built-in type, MFi iAP2 certified

(Consensus required)

Environment Characteristics

Temperature

Operating: 5 ~ 40°C (41 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Software

Emulation

SLCS, BPL-Z™, BPL-E™

Drivers

Windows Driver (Euro Plus/Seagull),

Linux / Mac CUPS Driver,

Virtual COM USB/Ethernet Driver, Utility Program,

Label Artist™

SDKs

Android SDK, Windows SDK

Fonts / Graphics / Symbologies

Fonts

• 10 SLCS Resident Bitmap Fonts

• One SLCS Resident Scalable Font

• 16 BPL-Z™ Resident Bitmap Fonts

• One BPL-Z™ Resident Scalable Font

• 5 BPL-E™ Resident Bitmap Fonts

• 23 Code Page

• Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics

Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies

1D: Codabar, Code 11, Code 39, Code 93,

Code 128, EAN-13, EAN-8, Industrial 2-of-5,

Interleaved 2-of-5, Logmars, MSI, Plessey,

Postnet, GS1 DataBar (RSS-14), Standard 2-of-5,

UPC/EAN extensions, UPC-A, UPC-E, IMB

2D: Aztec, Codablock, Code 49, Data Matrix,

MaxiCode, MicroPDF417, PDF417, QR code,

TLC 39

Options

Ethernet, WLAN (USB dongle type), Peeler,

Auto Cutter, RTC (Real Time Clock),

Bluetooth(Built-in type), External Paper Supply



BR-SLP-TX420-EN-MAY16-V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co., Ltd.
+82 (0) 31 218 5500
sales@bixon.com
www.Bixon.com



BIXOLON America Inc.
+1 858 764 4580
sales@bixonusa.com
www.BixonUSA.com



BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixon.de
www.BixonEU.com

